



FOR CLASSY LIVING



15013 # SONOMA OAK LIGHT



15014 # SONOMA OAK DARK



15016 # CANYON MONUMENT OAK LIGHT



15024 # PERFECT OAK



15053 # ABSOLUTE WOOD DARK



15052 # LATIN WALNUT LIGHT



15061 # SYNC OAK BROWN



15062 # CANYON WOOD BROWN



15055 # BROWN RIMINI WALNUT



15056 # CHERRY TENNESSEE



15006 # TAVERN OAK BROWN



15065 # OLD SCHOOL OAK



SURYA CLICK™
HDF LAMINATE FLOORING

• **Class 31** : Light commercial, Ideal for residential usages.

Hardness & Ratings are Explained Below :

(AC) Abrasion ratings are standardized measures adopted by the Association of the European producers of laminated flooring (EPFL). AC measures combines abrasion resistance, impact resistance, resistance to staining, cigarette burns & thickness swelling along the edges.

AC3 can be installed in light traffic commercial areas such as personal cabin & high end boutiques.

TECHNICAL SPECIFICATIONS



PRODUCT FEATURE	TEST STANDARD	AC 3
Abrasion Resistance	EN13329	AC 3
Impact Resistance	EN13329	IC1
Stain Resistance	EN438	Group 5
Cigarette Burns	EN438	Class 5
Light Fastness	EN20105/A02	Class 7
Furniture Legs	EN426	No Damage
Chair Caster (Soft Roll)	EN425	No Damage
Thickness Swelling	EN13329	≤18%
Static Indentation	EN433	0.9 N/mm ²
Flame Resistance	EN13501	CFL-S1
Edge Treatment		Wax Coated
Floor Design Dimensions		1190mm x 181mm x 8mm

Thickness 8 mm




Download the entire e-catalogue here



SURYA CLICKTM
HDF LAMINATE FLOORING

Structure

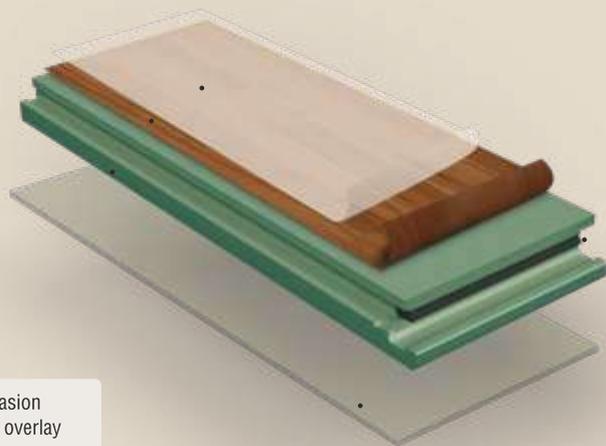

High abrasion resistant overlay

Decorative design layer

100% Hardwood HDF core

Moisture resistant backing layer

Click systems unique with inbuilt glass fiber reinforced tongue



EASY TO INSTALL
Fast and easy single action installation



IMPACT RESISTANT
High resistance to impact or abrasion from furniture legs & chair



STABILITY
Strong, resilient and dimensional stability



FIRE RETARDANT
Resistant to heat and flame



IMPROVES SOUND INSULATION
No shifting of short or long sides



SLIP RESISTANT
Skid-free and slip resistant

FEATURES



TERMITE, BORER AND FUNGUS RESISTANT



ENVIRONMENT FRIENDLY



SUITABLE FOR UNDERFLOOR HEATING



EASY TO CLEAN & MAINTAIN



CIGARETTE BURN RESISTANT



GLUE FREE INSTALLATION

Thickness : 8mm | Pack Area : 1.723 sq.mt. | Pack Unit : 8 planks | Dimensions : 1190 x 181 x 8 mm

Marketed by :



RUSHIL
DECOR LIMITED
WE'LL MAKE IT



The mark of responsible forestry



IGBCMM190255



SURYA
PANEL

SURYA PANEL PRIVATE LIMITED

Registered Office: Plot No. 62-K, Phase-II, Amble Industrial Area, Chikmagalur, Karnataka-577101, India.

Contact Us: Ph. No.: +91-79-61400400 | info@surya-panel.com | www.suryaclick.com
Toll-Free No.: 1800 233 7952 | Fax No.: +91-79-61400401