



Smart flooring

FOR CLASSY LIVING



SURYA CLICK[™]
HDF LAMINATE FLOORING



15025 / Selective Teak



15064 / Bratty Oak Grey



15063 / Odin Eiche Light



15054 / Novecento Pine



15058 / Merapi Walnut




15008 / Symphony Oak



15032 / Fiskbein Dark

T7

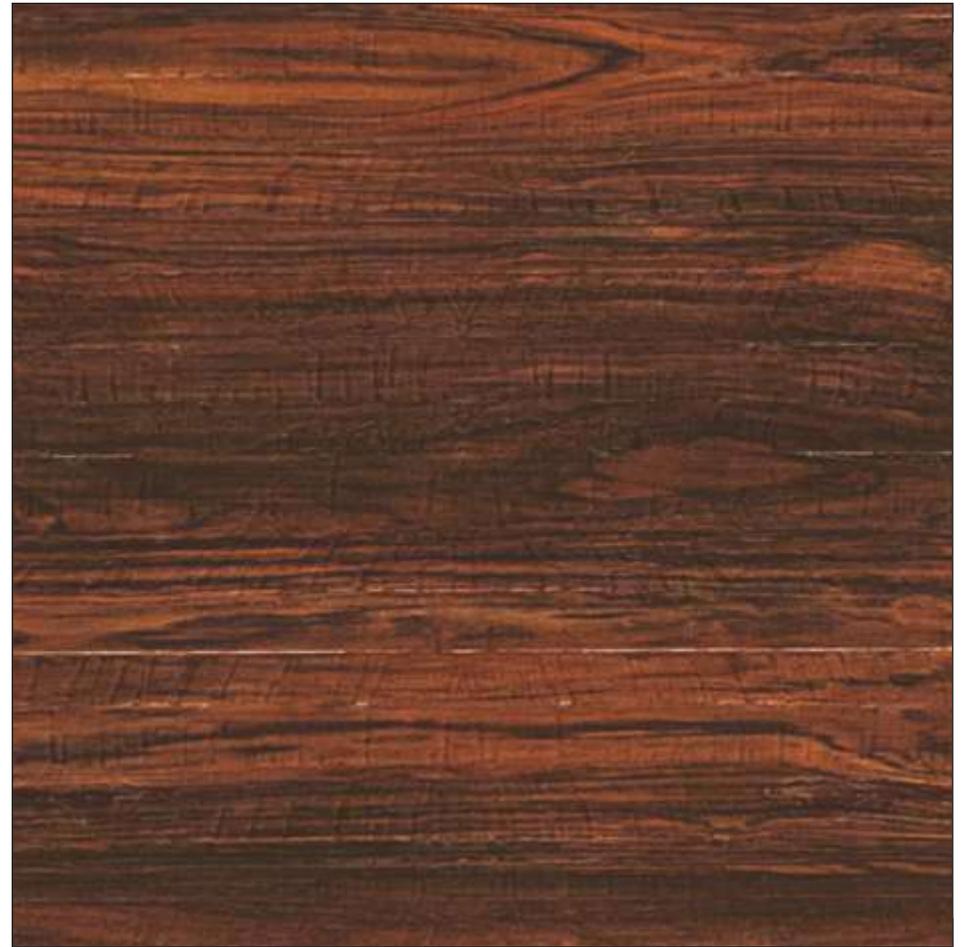

15049 / Rose Wood

T1



15050 / Chalet Oak Dark

T1



15057 / Angola Walnut Dark

T7



15022 / Columbia Walnut

T1



15030 / Nussabaum Harmony

T1



15017 / Canyon Monument Oak Dark

T1




15004 / Tavern Oak Light

T1



15027 / Palace Eiche

T1

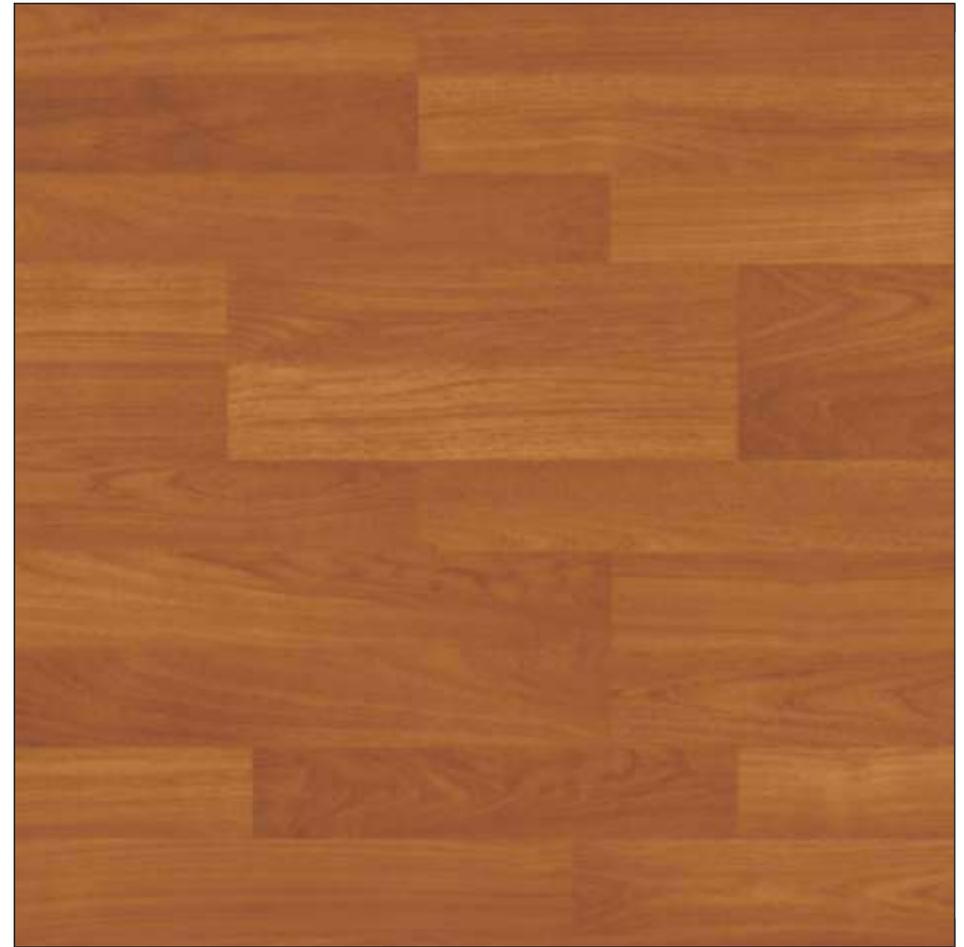

15025 / Selective Teak

T1



15021 / Lyon Walnut

T1




15064 / Bratty Oak Grey

T1




15063 / Odin Eiche Light

T7

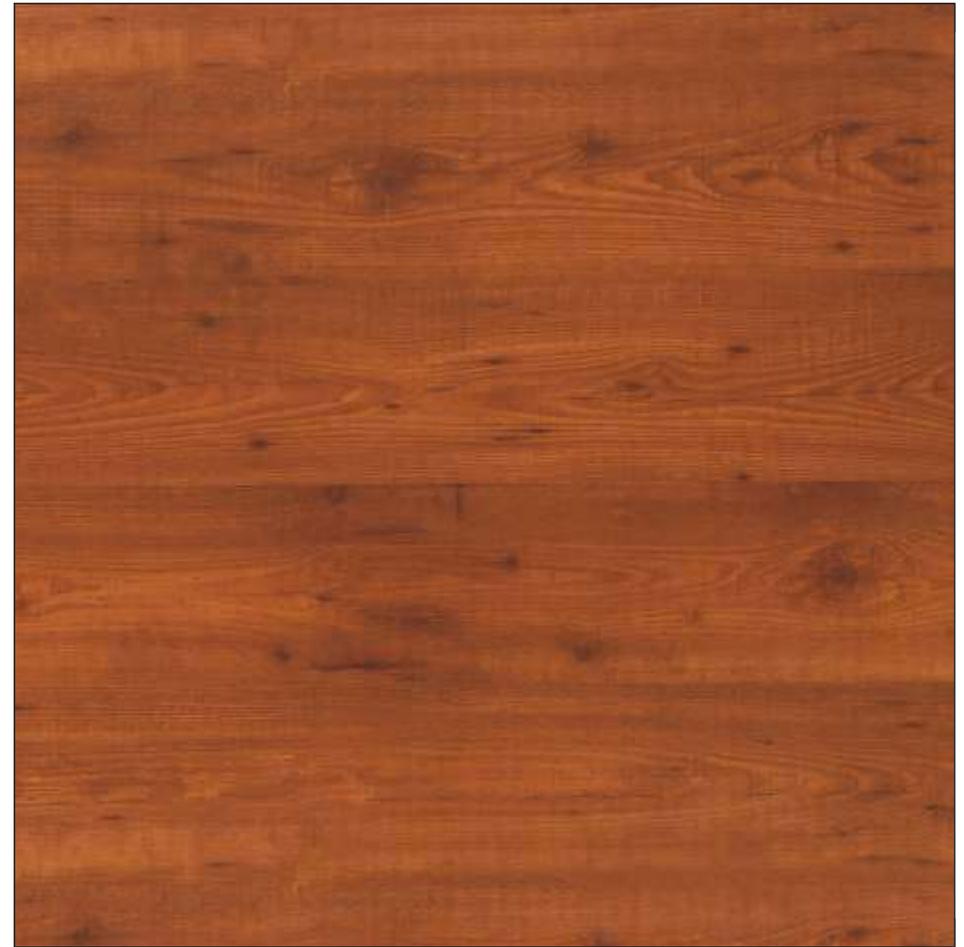

15054 / Novecento Pine

T1

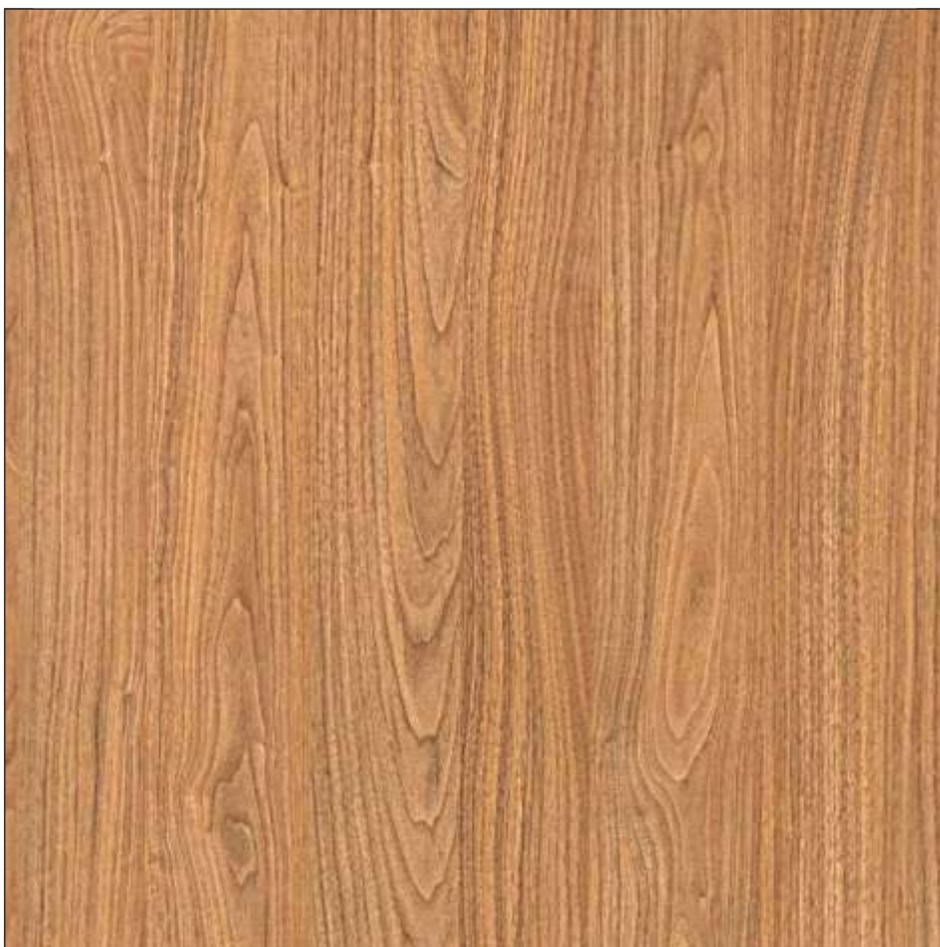

15058 / Merapi Walnut

T7



15008 / Symphony Oak

T7



15032 / Fiskbein Dark



15050 / Chalet Oak Dark



15057 / Angola Walnut Dark



15030 / Nussabaum Harmony



15017 / Canyon Monument



15004 / Tavern Oak Light




Download the entire e-catalogue here



SURYA CLICKTM
HDF LAMINATE FLOORING

Structure

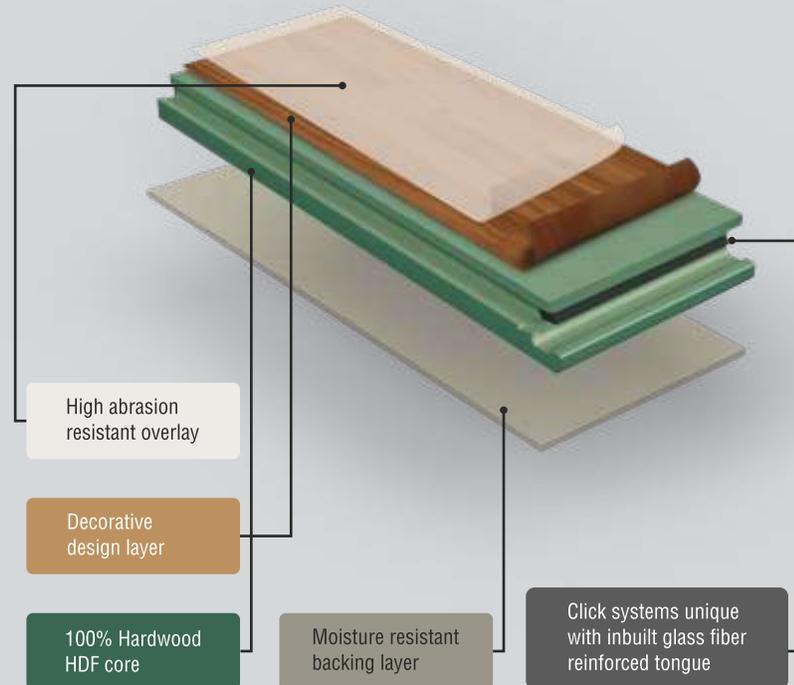

Class 32 : Moderate Commercial Ideal for Offices, Showrooms, Store's & Lounges, etc.

Hardness & Ratings are Explained Below:

(AC) Abrasion ratings are standardized measures adopted by the Association of the European producers of laminated flooring (EPFL). AC measures combines abrasion resistance, impact resistance, resistance to staining, cigarette burns & thickness swelling along the edges.

AC4 can be installed in higher traffic commercial areas such as boutiques, busy offices & restaurants.

TECHNICAL SPECIFICATIONS

PRODUCT FEATURE	TEST STANDARD	AC 4
Abrasion Resistance	En13329	AC 4
Impact Resistance	EN13329	IC1
Stain Resistance	EN438	Group 5
Cigarette Burns	EN438	Class 5
Light Fastness	EN20105/A02	Class 7
Furniture Legs	EN426	No Damage
Chair Caster (Soft Roll)	EN425	No Damage
Thickness Swelling	EN13329	≤18%
Static Indentation	EN433	0.9 N/mm ²
Flame Resistance	EN13501	CFL-S1
Edge Treatment		Wax Coated
Floor Design Dimensions		1190mm x 181mm x 8mm

Thickness 8 mm

Thickness : 8mm | Pack Area : 1.723 sq.mt.

Pack Unit : 8 planks | Dimensions : 1190 x 181 x 8 mm

FEATURES



TERMITE, BORER AND FUNGUS RESISTANT



ENVIRONMENT FRIENDLY



EASY TO INSTALL
Fast and easy single action installation



IMPACT RESISTANT
High resistance to impact or abrasion from furniture legs & chair



EASY TO CLEAN & MAINTAIN



CIGARETTE BURN RESISTANT



STABILITY
Strong, resilient and dimensional stability



FIRE RETARDANT
Resistant to heat and flame



SUITABLE FOR UNDERFLOOR HEATING



GLUE FREE INSTALLATION




IMPROVES SOUND INSULATION
No shifting of short or long sides



SLIP RESISTANT
Skid-free and slip resistant

Marketed by :


RUSHIL
DECOR LIMITED
WE'LL MAKE IT



SURYA
PANEL

SURYA PANEL PRIVATE LIMITED

Registered Office: Plot No. 62-K, Phase-II, Amble Industrial Area, Chikmagalur, Karnataka-577101, India.

Contact Us: Ph. No.: +91-79-61400400 | info@surya-panel.com | www.suryaclick.com
Toll-Free No.: 1800 233 7952 | Fax No.: +91-79-61400401

